

FLOW 9k Ti

PISTOL

HUXWRX SAFETY CO.


SUPERIOR PISTOL CALIBER PERFORMANCE

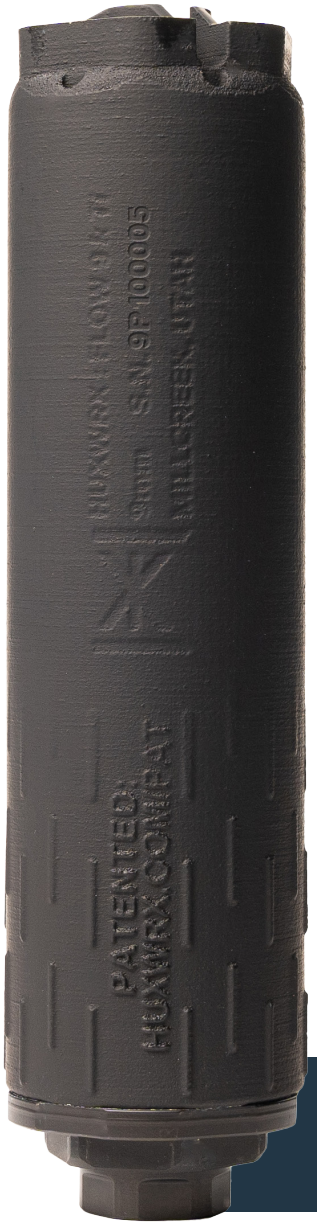

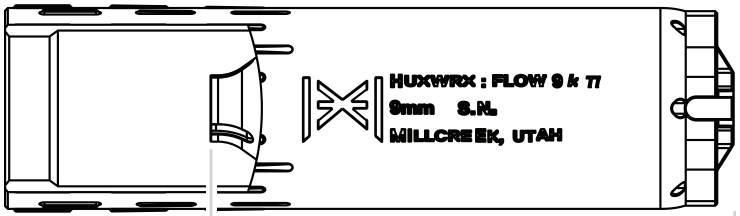

Distance to first baffle:
1.5in / 3.8cm

Length: 5.33in / 13.5cm,
5.87in / 14.9cm with included booster assembly



1.47in*
3.73cm*

*Base grip texture adds
0.05in (0.127cm)

PRODUCT SPECIFICATIONS

LENGTH ADDED TO BARREL	5.25in / 13.3cm with included Booster Assembly
WEIGHT	4.8oz / 136g – (8.9oz / 252g with included booster assembly)
CALIBER	9mm, 22 LR, 17 HMR, 5.7, 300 BO Subsonic & Supersonic, 350 Legend
MATERIALS	Suppressor: Grade 5 Titanium Booster Assembly: 17-4 Heat Treated Stainless Steel & 7075-T6 Aluminun
COATINGS	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) Booster Assembly: DLC/Black Nitride
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with ½ × 28 booster assembly and HUB Piston Adapter (3-LUG, HUB, stiction, and direct thread adapters available)
BARREL LENGTH	No restrictions
DURABILITY	Full-auto rated for 300 BO.
MAINTENANCE	Detailed cleaning should be performed every 2,000 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. For more information, visit www.huxwrx.com/warranty.