
FLOW RANGE 36 Ti


WITH HUB QD ADAPTER

HUXWRX SAFETY CO.



EXPAND YOUR RANGE

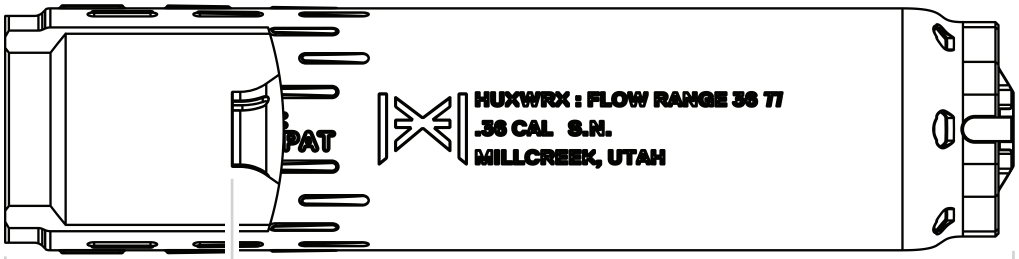



1.6in*
4.06cm*

*Base grip texture adds
0.05in (0.127cm)

Distance to first baffle:
1.5in / 3.8cm

Length: 6.67in / 16.9cm,
7.54in / 19.2cm with included HUB QD adapter

PRODUCT SPECIFICATIONS

LENGTH ADDED TO BARREL	6.92in / 17.6cm with included HUB QD adapter
WEIGHT	8.4oz / 238g – (12oz / 340g with included HUB QD adapter)
CALIBER	Pistol calibers up to 9mm; Rifle calibers 17 HMR–.338 Lapua, .338 arc, 8.6 blkout
MATERIALS	Suppressor: Grade 5 Titanium HUB QD adapter: 17-4 Heat Treated Stainless Steel
COATINGS	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) HUB QD adapter: DLC/Black Nitride
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with HUB QD adapter (3-LUG, HUB, stiction, and direct thread adapters available)
BARREL LENGTH	No restrictions
DURABILITY	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
MAINTENANCE	Detailed cleaning should be performed every 2,000 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co.
For more information, visit www.huxwrx.com/warranty.