
VENTUM 556

RIFLE

HUXWRX SAFETY CO.




ENGINEERED WITH PURPOSE

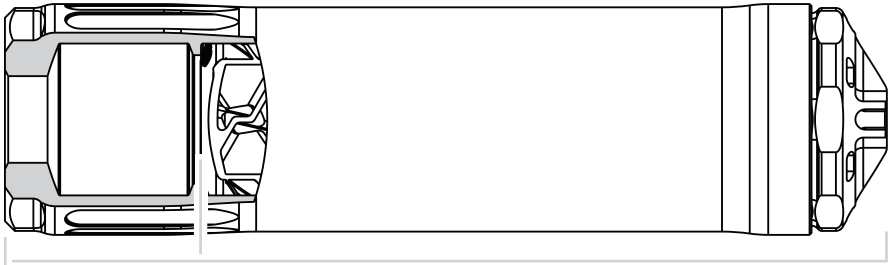

Distance to first baffle:
1.49in / 3.78cm

Length: 6.7in / 17.0cm
6.94in / 17.6cm with included direct thread adapter

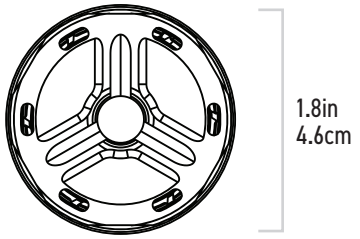

1.8in
4.6cm

Length added to barrel:
6.36in / 16.2cm with
included direct thread adapter

PRODUCT SPECIFICATIONS

WEIGHT	15.2oz / 431g – 17.0oz / 482g with included direct thread adapter
CALIBER	5.56, .223, 17 HMR, 5.7, 22 LR, 5.45
MATERIALS	Suppressor: 3D-printed Grade 5 Titanium core and 17-4 Heat Treated Stainless Steel housing Direct thread adapter: 17-4 Heat Treated Stainless Steel
COATINGS	Suppressor: Black Nitride QPQ Direct thread adapter: Black Nitride QPQ
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with 1/2x28 direct thread adapter; QD Hub compatible—see second page
BARREL LENGTH	No restrictions
DURABILITY	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
MAINTENANCE	Detailed cleaning should be performed every 2,500 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co.
For more information, visit www.huxwrx.com/warranty.

VENTUM 556

RIFLE

HUXWRX SAFETY CO.

APPROVED MOUNTS



HUXWRX HUB-QD



Q PLAN-B



SILENCERCO ASR BRAVO



RUGGED UNIVERSAL MOUNT (RUM)



DEAD AIR XENO



DEAD AIR KEYMO