



# SilencerCo Omega 9K

---

Field Manual

Thank you for choosing to add a SilencerCo suppressor to your collection. We love what we do and take great pride in the products we produce, and hope you will enjoy using this product as much as we enjoyed making it.

Each SilencerCo product carries our Lifetime Warranty. Should you have any questions after reading this manual, our best-in-class customer service team will be glad to assist you.

Again, thank you for joining SilencerCo as we work to **#FightTheNoise**.

Sincerely and Silently,



Joshua Waldron  
SilencerCo Co-Founder & CEO

OMEGA 9K





**W**e at SilencerCo® hope that you enjoy the technological advancements offered by the Omega 9K™ sound suppressor. To provide for your safety and the effective use of this suppressor, it is critical that the owner and any user of the suppressor read this entire manual and follow strictly the warnings and instructions within. This suppressor is intended to be used only by those who are well-versed in the safe operation of firearms.

#### MANUFACTURER'S DISCLAIMER

The manufacturer is not responsible for improper usage of this product. This product is potentially dangerous, and, as such, it is the user's responsibility to understand and implement its proper use. If you do not understand the instructions in this manual, please contact the manufacturer for further clarification at **801.417.5384**.

**Note: Suppressors must be free of obstructions such as mud, dirt, etc. Do NOT attempt to shoot through an obstructed suppressor.**

#### SONIC CRACK

The Omega 9K is designed to suppress the initial muzzle blast and subsequent projectile de-corking pressure. The Omega 9K does not contact or otherwise interact with the projectile, allowing the projectile to travel at its default velocity. When using supersonic ammunition, a sonic crack is produced by the projectile as it breaks the sound barrier. Depending on the geography of the area, the sonic crack may vary in volume. This is solely a function of the projectile breaking the sound barrier and is not related to suppressor performance.

## WARNING

Failure to follow installation and maintenance instructions detailed in this manual may result in serious personal injury and damage to the weapon. Firearm sound suppressors are user-attached firearm muzzle devices, and as such are subject to improper attachment issues unless the procedures outlined in this manual are followed precisely. Do not attempt to use this product unless you have specific training and experience in the use of firearms.

Before installing or removing the Omega 9K sound suppressor from the host weapon, be sure that the weapon is unloaded and the action is opened so that it is visibly clear of any ammunition. If you are at all unsure as to the proper

procedures to ensure that your firearm is unloaded, please consult your firearm user's manual/instructions and/or contact a properly licensed dealer or the manufacturer of your weapon.

Because suppressed firearms make less noise than unsuppressed firearms, it is easy to forget that they are still firearms and capable of causing bodily injury and property damage. It is of vital importance to remember that a suppressed firearm is just as dangerous as an unsuppressed firearm, and that the same safe handling requirements still apply.

When removing the Omega 9K, use extreme caution as it may be hot to the touch after firing. Use gloves to avoid burns or other injuries.

Check the fit between barrel and suppressor before firing! The thread mount must be fully shouldered on the barrel. There should be no visible gap between the barrel shoulder and the face of the suppressor thread mount. If there is any gap DO NOT fire the host with the suppressor attached. Poor accuracy and product damage may result if the suppressor is not fully shouldered.

Assembly and disassembly should never be performed while the suppressor is affixed in any manner to a host firearm. Always completely remove the Omega 9K from the host firearm before assembly and/or disassembly is attempted.

Before performing maintenance, removing, or installing the suppressor, open the action, ensure firearm is unloaded, and be sure the chamber is empty. Failure to do so can result in property damage, injury, or death.

## MADE IN THE USA


The Omega 9K, like the full-size Omega from which it draws its name, is an exceptionally versatile suppressor and is the smallest, lightest, and quietest silencer in its class under 5" in the world. Full auto rated and usable with pistols, rifles, and submachine guns, the Omega 9K offers extreme durability in an ultra-compact package and is compatible with 9mm and 300 Blackout.

The Omega 9K is full auto rated on barrel lengths as short as 8" for 300 BLK supersonic and subsonic ammunition.

The Omega 9K was designed to be used "dry" and free of any ablative media, such as grease and water. If submerged in water, the user must allow a minimum 6 second drain time after exiting the water.

### MOUNTING OPTIONS

Whether you want to use the Omega 9K on a pistol or rifle, care should be taken to ensure that the suppressor is mounted securely to your firearm before firing. These instructions will help to prevent the problems and dangers that can arise from improper seating.

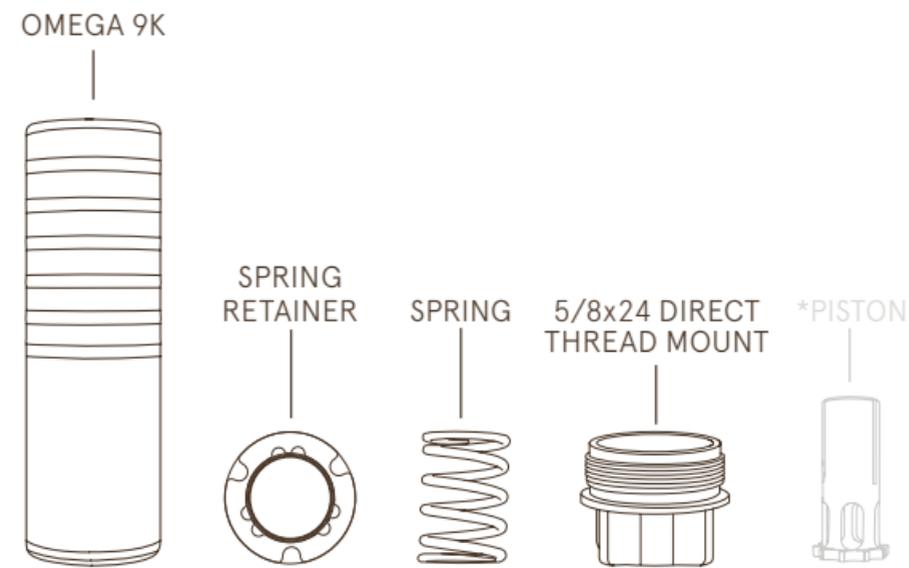


## PRODUCT SPECS

### INCLUDED

The Omega 9K ships with the pre-installed spring and spring retainer for piston mounting on pistols and subguns as well as a 5/8x24 direct thread mount for use on 300 Blackout hosts. No tools are required for installation or removal of mounts.

**\*Note: Piston not included. Must be purchased through dealer.**

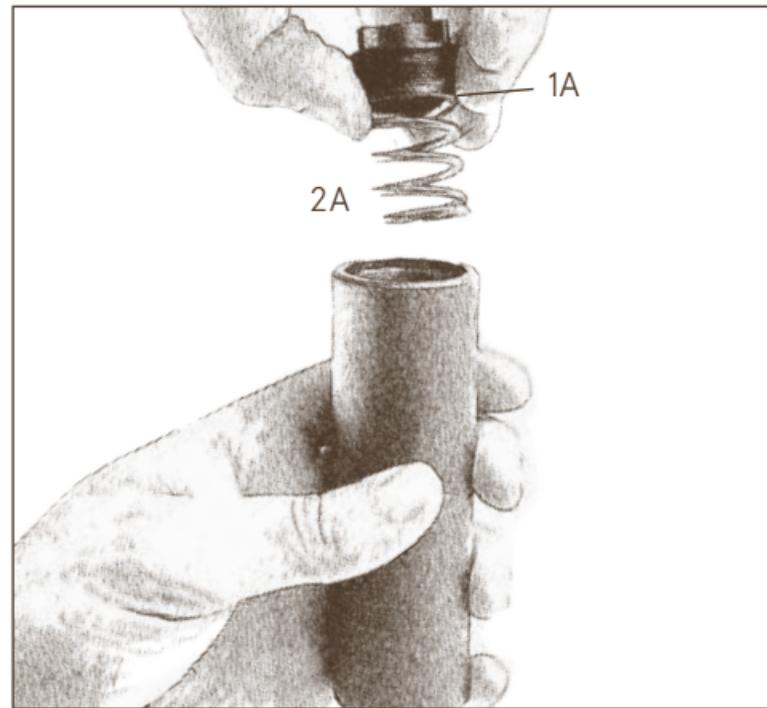


## PISTON MOUNT


The Omega 9K ships with the spring and spring retainer/back cap installed. You will need to install a piston (not included) into this housing in order for it to be compatible with a host.

Step 1: Unscrew the spring retainer/back cap (1A) from the rear of the Omega 9K and remove the spring (2A) from the suppressor body; no tools are required.

Step 2: Place the spring over your piston (3A).

Step 3: Seat the non-knurled end of the piston into the spring retainer/back cap.

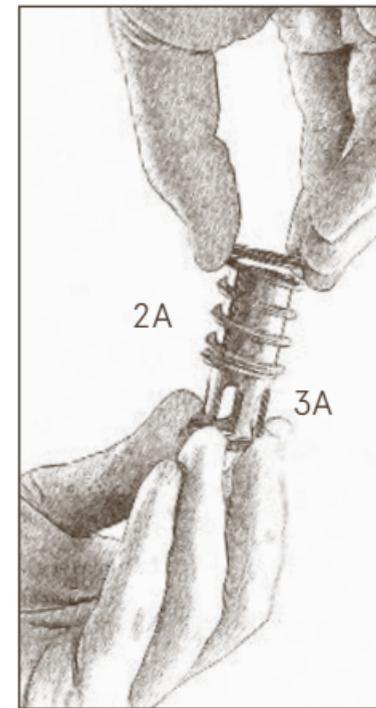

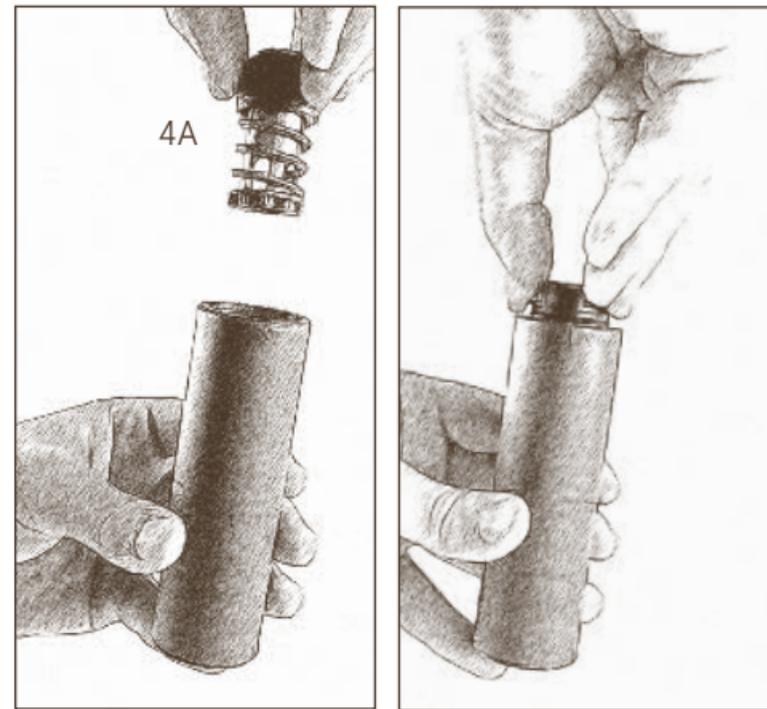

## PISTON MOUNT *CONTINUED*

Step 4: Once the spring, piston, and retainer are properly seated together, place the assembly (4A) back into Omega 9K.

Step 5: Hand tighten the spring retainer/back cap into the piston housing.


To remove the piston housing, reverse these steps.

## MOUNTING *ON A PISTOL*

After confirming that your firearm is unloaded and securely seating the piston housing into the Omega 9K, thread the suppressor onto the threaded barrel of your pistol. Hand tighten only.

To remove from host, reverse these instructions.



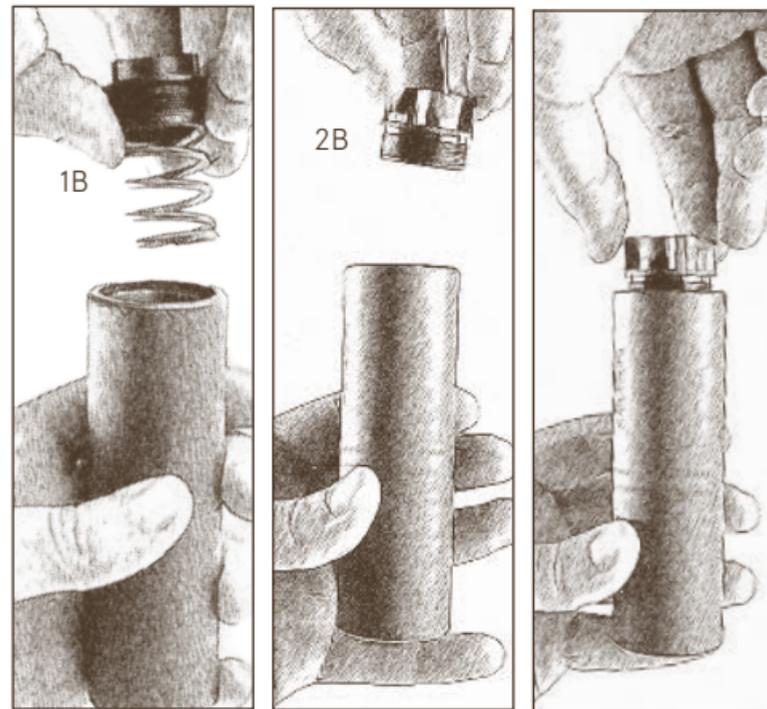

## DIRECT THREAD MOUNT

Step 1: Remove the spring and spring retainer/back cap (1B) that ships installed on the Omega 9K.


Step 2: Screw the direct thread mount (2B) into the base of the suppressor.

Step 3: Hand tighten the mount until it is securely seated in the Omega 9K.

## MOUNTING *ON A RIFLE*

After confirming that your firearm is unloaded, place the direct thread mount over the threads of the barrel (3B). Taking care not to cross-thread, screw the suppressor onto the barrel until it is firmly secured and no additional barrel threading is visible. Hand tighten only.

To remove from host, reverse these instructions.

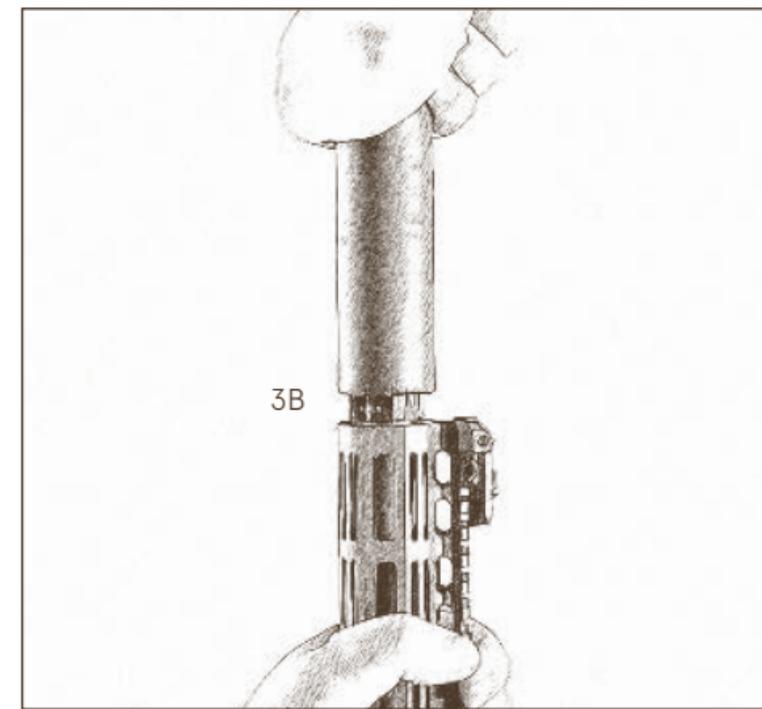

## MAINTENANCE

The Omega 9K typically requires limited maintenance. Mounts should periodically be cleaned with any standard gun cleaning solvent and a brush to remove any carbon or fouling. If necessary, run a cleaning brush through the bore to remove any light fouling of the suppressor.

**Note: Do not run cleaning patches through the bore as the patches might become lodged in the suppressor and cause damage upon firing.**

**Caution: Always read the warning label on any cleaner or solvent, and remember that virtually all solvents are inherently dangerous and potentially toxic. Always use adequate ventilation and both skin and eye protection**

## LIMITED LIFETIME WARRANTY

LIMITATIONS TO WARRANTY: THIS WARRANTY DOES NOT COVER DAMAGE TO THE SUPPRESSOR OR THE HOST FIREARM RESULTING FROM CARELESS OR IRRESPONSIBLE HANDLING, ADJUSTMENTS OR MODIFICATIONS TO ITS DESIGN, NEGLIGENCE OR OTHER ABUSE. SILENCERCO ASSUMES NO LIABILITY WHATSOEVER FOR UNSAFE USE OF THE SUPPRESSOR OR ILLEGAL USE BY ITS PURCHASER OR ANY OTHER PERSON THAT COMES IN CONTACT WITH THE PRODUCT AFTER PURCHASE. SILENCERCO ASSUMES NO RESPONSIBILITY FOR PHYSICAL INJURY OR PROPERTY.

DAMAGE RESULTING FROM CARELESS OR IRRESPONSIBLE HANDLING AND/OR USE, OR BY ANY USE CONTRARY TO THE RECOMMENDATIONS, WARNINGS AND CAUTIONS GENERALLY LISTED IN THIS MANUAL. SILENCERCO DOES NOT COVER DAMAGE TO THE SUPPRESSOR OR THE HOST FIREARM RESULTING FROM IMPROPER HAND-LOADED OR RELOADED AMMUNITION OR DEFECTIVE AMMUNITION.

## REPAIR POLICY

Should the silencer require repair or modification, the owner should contact SilencerCo either in writing or by telephone. Many problems can be handled without having to return the product. If it is determined that the product needs to be returned for repair or modification, contact SilencerCo customer service **801.417.5384** to obtain an RMA number. Do not return the suppressor to SilencerCo until you have contacted customer service, as an RMA code must be provided.

If repairs are required due to a defect in manufacturing or materials, there will be no charge for repairs. Subject to any restrictions set forth herein, SilencerCo agrees to replace and/or repair the Omega 9K for an unlimited amount of time. This warranty covers repair, service and replacement of damaged product caused by normal use, free of charge, only if performed at a SilencerCo facility.

Should a silencer require repair, the owner must contact SilencerCo and make arrangements to return the product. Customer must return damaged product with a legible copy of the approved ATF form and a legible written description of the problem, defect and/or malfunction. Please include in written description the serial number of the product and the events leading up to the issue, including what ammunition has been used and any host weapons that have been used. If

SilencerCo determines, at its sole and absolute discretion, that a returned suppressor is not covered under this warranty, for any reason, you may purchase a replacement product at 75% off the suggested retail price.



SALVO 12

SHOTGUN SUPPRESSOR




OMEGA



HARVESTER BIG BORE 338



HARVESTER 30



SAKER 762



SAKER 556



SAKER 556 K



SPECWAR 762



SPECWAR 556



SPECWAR 556 K

RIFLE SUPPRESSORS



HYBRID



OMEGA 9 K



OSPREY 45



OSPREY 9



OSPREY 45 K



OCTANE 45



OCTANE 9



OCTANE 45 K

PISTOL SUPPRESSORS



OSPREY MICRO



SPARROW 22



WARLOCK 22



SPECTRE 22

RIMFIRE SUPPRESSORS



**Register Your SilencerCo Product Online  
To Activate Your Lifetime Warranty**

[WWW.SILENCERCO.COM/PRODUCT-REGISTRATION](http://WWW.SILENCERCO.COM/PRODUCT-REGISTRATION)



 **Follow Us**

**Join ASA Today**

PROTECT YOUR RIGHTS | PROTECT YOUR HEARING





---

The American Suppressor Association  
is fighting to protect and expand your  
suppressor rights. Join the fight today!

*Become a member at*  
[WWW.ASAMEMBER.COM](http://WWW.ASAMEMBER.COM)

---

*Contact us at:*  
[INFO@AMERICANSUPPRESSORASSOCIATION.COM](mailto:INFO@AMERICANSUPPRESSORASSOCIATION.COM)

---

# Follow Us

---



/SILENCERCO



/SILENCERCO



@SILENCERCO



@SILENCERCO

**Note: If you have any questions whatsoever about whether you are performing the assembly, disassembly, or cleaning of the suppressor properly and in accordance with these instructions, you may contact SilencerCo customer service by phone at 801.417.5384 or via email at [info@silencerco.com](mailto:info@silencerco.com)**

**For a list of available mounts and suppressors visit [SILENCERCO.COM/PRODUCTS/OMEGA-9K](http://SILENCERCO.COM/PRODUCTS/OMEGA-9K)**

© 2016 SilencerCo, LLC. All rights reserved. The contents of this publication may not be reproduced in any form or by any means in whole or in part without the prior written permission of the copyright owner.

